



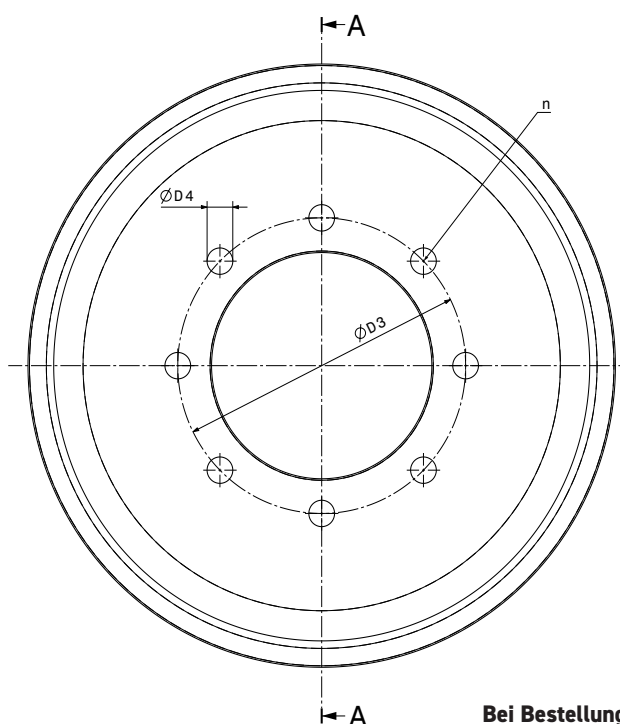

BREMSTROMMEL

DIN 15 431

M 1501 135 E-DE-2016-10

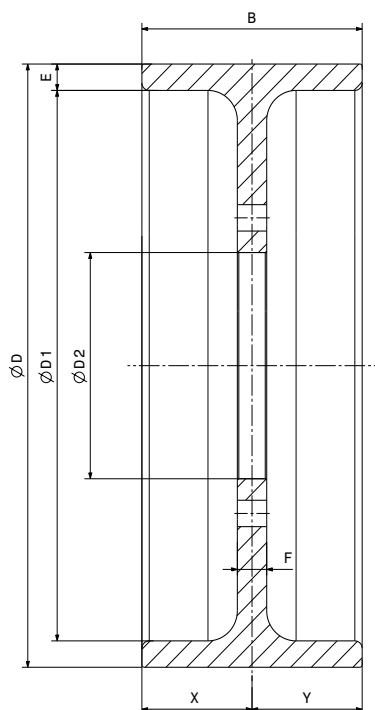

Bei Bestellung angeben:

Bohrung- Ø D2
Lochkreis- Ø D3
Bohrungs- Ø D4
Anzahl n
X; Y

D x B mm	dyn. Auswuchten ab 1/min.	Ø D ₁	Ø D ₂ Vorbohr. mm	Ø D ₂	Ø D ₃	Ø D ₄	n	X	Y	E	F	Gewicht bei Vorbohrung kg (St.)	Massenträg- heitsmoment kgm ² (steel)
Ø 200x75	2500	176	20							12	12	8,7	0,04792
Ø 250x95	2000	220	25							15	15	16,8	0,15213
Ø 315x118	1570	285	30							15	18	28,5	0,44072
Ø 400x150	1240	365	35							17,5	20	51,8	1,24421
Ø 500x190	990	460	50							20	22	91,7	3,57137
Ø 630x236	790	580	50							25	26	173,8	10,2168
Ø 710x265	700	650	70							30	30	261,4	18,4063

Sonderausführung auf Anfrage